


# NEX SERIES® 单相双泵控制器

Single phase, duplex motor contactor control.

The NEX Series® 双泵控制柜可控制两台单相水泵，可适用于三种电压120, 208, or 240 VAC单相。控制器通过两个浮球开关提供液位信号，控制水泵工作。当液位上升时，启动浮球启动一台水泵排水。如果液位继续上升，报警浮球触发，启动第二台泵，并发出高液位报警。当报警浮球断开，报警停止。当启动浮球断开，两台泵同时停止工作。每次两台泵轮流启动，确保每台泵的工作时间均等。小巧紧凑的外形设计（尺寸25.4 x 20.32 x 10.16 cm），是家用的理想选择。控制器自带安装配件，安装简单方便。

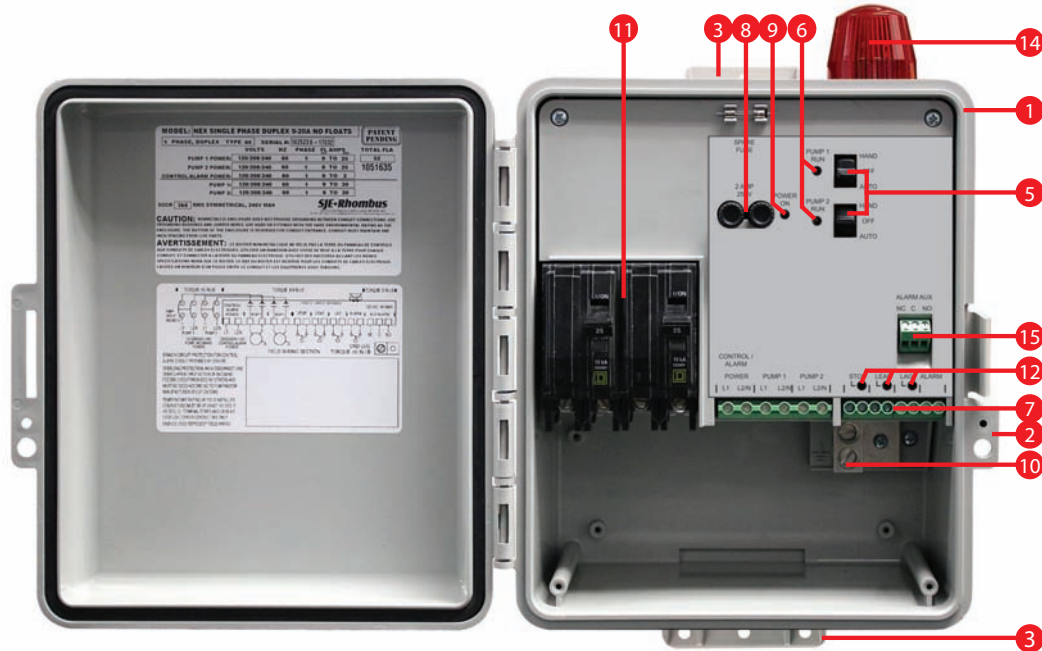

## 元器件

1. 外壳尺寸 25.4 X 20.32 X 10.16 cm (10 x 8 x 4 inches) NEMA 4X 抗紫外线外壳，适用于室内及室外
2. 外壳安全锁
3. 安装孔
4. 功率继电器通过电路控制泵
5. HOA 手动/自动选择开关
6. 绿色水泵运行指示灯
7. 现场接线端子排
8. 控制/报警回路保险丝
9. 控制/报警电源指示灯
10. 接地极
11. 断路器提供泵断开和支路保护
12. 浮球运行状况指示灯
13. 计时器 (选配)，记录每台泵的运行小时数

## 标准配置

14. 红色报警顶灯提供 360° 可视报警
15. 提供辅助报警触点，用于远程装置连接
16. 报警蜂鸣器，音量85dB~90dB.
17. 外置报警测试/静音开关，可测试蜂鸣器和指示灯。  
报警状况解除后，报警器会自动重置。



**SJE RHOMBUS**

PO Box 1708, Detroit Lakes, MN 56502

Phone: +1 218 847 1317

email: customer.service@sjerhombus.com

www.sjerhombus.com

# NEX SERIES® 单相双泵控制器

Single phase, duplex motor contactor control.

## 订购信息

| 产品料号 #  | 描述   | 额定电流 | 重量      |
|---------|--|------|---------|
| 1051630 | NEX Series® Single Phase Duplex, 120/208/240 VAC, (4) 6 meter (20 ft) SJE SignalMaster® control float switches | 0-12 | 6.35 kg |
| 1051631 | NEX Series® Single Phase Duplex, 120/208/240 VAC, (3) 6 meter (20 ft) SJE SignalMaster® control float switches | 0-12 | 5.44 kg |
| 1051632 | NEX Series® Single Phase Duplex, 120/208/240 VAC, no float switches  | 0-12 | 4.08 kg |
| 1051633 | NEX Series® Single Phase Duplex, 120/208/240 VAC, (4) 6 meter (20 ft) SJE SignalMaster® control float switches | 9-20 | 6.35 kg |
| 1051634 | NEX Series® Single Phase Duplex, 120/208/240 VAC, (3) 6 meter (20 ft) SJE SignalMaster® control float switches | 9-20 | 5.44 kg |
| 1051635 | NEX Series® Single Phase Duplex, 120/208/240 VAC, no float switches  | 9-20 | 4.08 kg |

| 产品料号 #  | 描述 - 配置计时器   | 额定电流 | 重量      |
|---------|--|------|---------|
| 1053263 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMs, (4) 6 meter (20 ft) SJE SignalMaster® control float switches | 0-12 | 6.35 kg |
| 1053264 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMs, (3) 6 meter (20 ft) SJE SignalMaster® control float switches | 0-12 | 5.44 kg |
| 1053265 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMS, no float switches  | 0-12 | 4.08 kg |
| 1053266 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMs, (4) 6 meter (20 ft) SJE SignalMaster® control float switches | 9-20 | 6.35 kg |
| 1053267 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMs, (3) 6 meter (20 ft) SJE SignalMaster® control float switches | 9-20 | 5.44 kg |
| 1053268 | NEX Series® Single Phase Duplex, 120/208/240 VAC, w/ETMs, no float switches  | 9-20 | 4.08 kg |

SEE INTERNATIONAL PRICEBOOK FOR LIST PRICING.

## 规格

电压:

水泵: 120/208/240V 单相, 50/60 Hz

控制/报警: 120/208/240V 单相, 50/60 Hz

外壳: 25.4 X 20.32 X 10.16 cm (10 x 8 x 4 inches), 抗紫外线外壳, 适用于室内及室外

控制浮球电压: 12 VDC

水泵电流: 0-12 A; 9-20 A

辅助报警触点: Form C, 120V Max.



**SJE RHOMBUS**

www.sjrhombus.com  
customer.service@sjrhombus.com